


LANDSCAPE LIGHTING

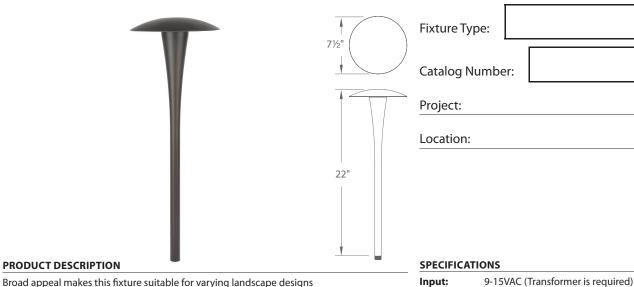

Broad appeal makes this fixture suitable for varying landscape designs

FEATURES


- IP66 rated, Protected against powerful water jets
- Factory sealed water tight fixtures
- Translucent lens provides uniform light distribution
- Solid brass or corrosion resistant aluminum alloy
- Mounting stake, 6 foot lead wire, and direct burial gel filled wire nuts are included
- Maintains constant lumen output against voltage drop
- UL 1838 Listed

ORDERING NUMBER

	(Color Temp		Finish	
6011 Area	a Light	27 30	2700K 3000K	BBR BZ BK	Bronze on Brass Bronze on Aluminum Black on Aluminum

6011- BBR

Example: 6011-30BZ



Power:

CRI:

Brightness:

Rated Life:

5.8W / 9.4VA

60,000 hours

150 lm

90+



Surface Mount Flange/Stake



Includes three 7 inch threaded stainless steel stabilizing pins for ground mounting or surface mounts with four screws or over a junction box

5000-SCP-BZBronze on Aluminum

Additional Mounting Stake



9000-ST9-BKDurable PVC stake

Magnetic Transformers

Stainless Steel, 12-15V output, IP65 rated, UL 1838 listed See transformer spec sheet for details and its accessories

9075-TRN-SS *75W Max*

9150-TRN-SS *150W Max*

9300-TRN-SS 300W Max

9600-TRN-SS 600W Max



TESTED MAGNETIC LOW VOLTAGE(MLV) DIMMERS

Luminaire	Dimmer							
	Manufacturer	Family	Model	Power Rating	Range*	Note		
6011		Diva	DVLV-600	600W	33% - 100%	Output maxes at 50% dimming level		
	Lutron	Skylark	SLV-600P	600W	28% - 100%	Output maxes at 50% dimming level		
		Skylark	S-10P	1000W		Not recommended		

^{*}Low end of this range is determined by output current which may not directly translate to the perceived light output

WAC Lighting fixtures are compatible with a variety of dimmers. For your convenience we have included a compatibility chart showing dimmers which have been tested with our products. The recommended list below is based upon testing conducted in a lab, and the results can vary in certain field applications due to a number of factors. Exclusion from the list does not imply incompatibility, just that it has not been tested by WAC Lighting. Please reference the dimmer manufacturer's instructions for installation, or contact a WAC lighting professional at 800-526-2588.