TOWER 12V/120V/277V LED BOLLARD 6621/6622/6623



LANDSCAPE LIGHTING

Fixture Type:

Catalog Number:

Project:

Location:

PRODUCT DESCRIPTION

Sleek linear design blends seamlessly into pathways while providing soft, even illumination

FEATURES

- IP66 rated, Protected against powerful water jets
- Factory sealed water tight fixtures
- Mounting accessories included .
- UL & cUL 1838 Listed (12V); 1598 Listed (120V/277V)

| Model | | Color Temp | | Finishes | |
|-------|------|------------|------------------|----------|--------------------|
| 6621 | 12V | 27 | 2700K Warm White | BZ | Bronze on Aluminum |
| | | 30 | 3000K Pure White | BK | Black on Aluminum |
| 6622 | 120V | 27 | 2700K Warm White | BZ | Bronze on Aluminum |
| | | 30 | 3000K Pure White | BK | Black on Aluminum |
| 6623 | 277V | 27 | 2700K Warm White | BZ | Bronze on Aluminum |
| | | 30 | 3000K Pure White | BK | Black on Aluminum |

6622-___BZ

Example: 6622-30BZ

SPECIFICATIONS

| 6621 | | | | |
|---------------------|-----------------------------------|--|--|--|
| Input: | 9-15VAC (Transformer is required) | | | |
| Power: | 5.5W / 6.0VA | | | |
| Brightness: | Up to 185 lm | | | |
| CRI: | 90 | | | |
| Rated Life: | 60,000 hours | | | |
| Dimming: | MLV dimming only | | | |
| 6622 | | | | |
| 6622 | 1201/ | | | |
| Input: | 120V | | | |
| Power: | 12.5W | | | |
| Brightness: CRI: | - | | | |
| | 90 | | | |
| Rated Life: | | | | |
| Dimming: | TRIAC or ELV dimming | | | |
| 6623 | | | | |
| Input: | 277V | | | |
| Power: | 10.5W | | | |
| Brightness: | Up to 455 lm | | | |
| CRI: | 90 | | | |
| Rated Life: | 60,000 hours | | | |
| Dimming: | ELV dimming only | | | |
| | | | | |

Mounting accessory included




waclighting.com Phone (800) 526.2588 (800) 526.2585 Fax

Headquarters/Eastern Distribution Center 44 Harbor Park Drive Port Washington, NY 11050

Central Distribution Center 1600 Distribution Ct Lithia Springs, GA 30122

Western Distribution Center 1750 Archibald Avenue Ontario, CA 91760


WAC Lighting retains the right to modify the design of our products at any time as part of the company's continuous improvement program.



TOWER 12V/120V/277V LED BOLLARD 6621/6622/6623

WAC LANDSCAPE LIGHTING

• Recommended spacing for installation : 6621 (12V) Residential: 12 to 14.5ft Commercial: 4 to 6.5ft

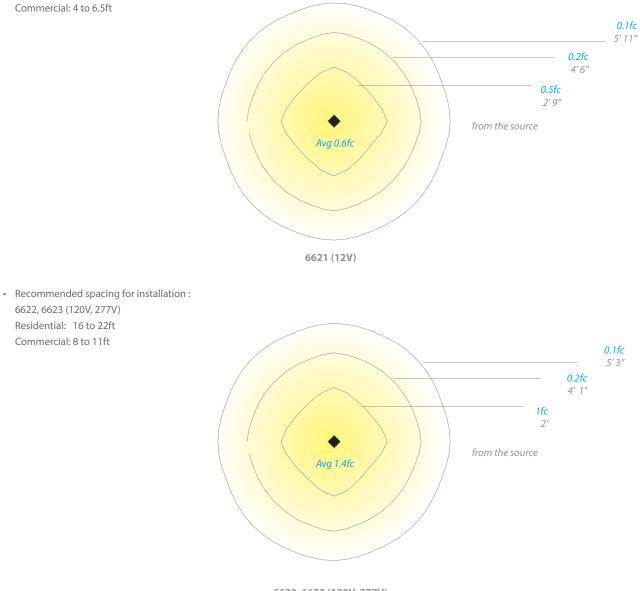

6622, 6623 (120V, 277V)

waclighting.com Phone (800) 526.2588 Fax (800) 526.2585

Commercial: 8 to 11ft

Headquarters/Eastern Distribution Center 44 Harbor Park Drive Port Washington, NY 11050

Central Distribution Center 1600 Distribution Ct Lithia Springs, GA 30122

Western Distribution Center 1750 Archibald Avenue Ontario, CA 91760

WAC Lighting retains the right to modify the design of our products at any time as part of the company's continuous improvement program.