PARK 12V/120V/277V LED BOLLARD

6641/6642/6643



LANDSCAPE LIGHTING



Fixture Type:	
Catalog Numbe	er:
Project:	
Location:	

PRODUCT DESCRIPTION

Sleek linear design blends seamlessly into pathways while providing soft, even illumination

FEATURES

- IP66 rated, Protected against powerful water jets
- · Factory sealed water tight fixtures
- · Mounting accessories included
- UL & cUL 1838 Listed (12V); 1598 Listed (120V/277V)

Model	Model Color Temp		Finishes		
6641	12V	27	2700K Warm White	BZ	Bronze on Aluminum
	120	30	3000K Pure White	BK	Black on Aluminum
6642	120V	27	2700K Warm White	BZ	Bronze on Aluminum
		30	3000K Pure White	BK	Black on Aluminum
6643	277V	27	2700K Warm White	BZ	Bronze on Aluminum
		30	3000K Pure White	вк	Black on Aluminum

6643- BZ

Example: **6643-30BZ**

SPECIFICATIONS

6641

Input: 9-15VAC (Transformer is required)

Power: 5.5W / 6.0VA Brightness: Up to 150 lm

CRI: 90

Rated Life: 60,000 hours
Dimming: MLV dimming only

6642

 Input:
 120V

 Power:
 12.5W

 Brightness:
 Up to 390 lm

 CRI:
 90

Rated Life: 60,000 hours

Dimming: TRIAC or ELV dimming

6643

 Input:
 277V

 Power:
 10.5W

 Brightness:
 Up to 430 lm

 CRI:
 90

Rated Life: 60,000 hours
Dimming: ELV dimming only




waclighting.com Phone (800) 526.2588 Fax (800) 526.2585 Headquarters/Eastern Distribution Center 44 Harbor Park Drive Port Washington, NY 11050 Central Distribution Center 1600 Distribution Ct Lithia Springs, GA 30122 **Western Distribution Center** 1750 Archibald Avenue Ontario, CA 91760

PARK 12V/120V/277V LED BOLLARD 6641/6642/6643

 $\bullet \quad \hbox{Recommended spacing for installation:} \\$


6641 (12V)

Residential: 11.5 to 14ft Commercial: 7 to 9ft

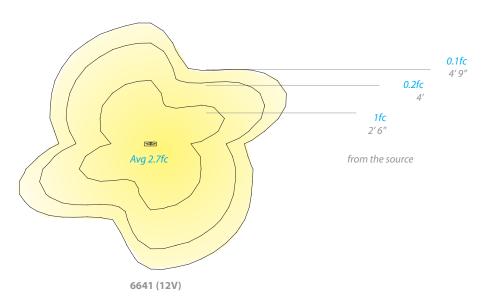

• Recommended spacing for installation :

6642, 6643 (120V, 277V) Residential: 12.5 to 14.5ft Commercial: 8 to 9.5ft

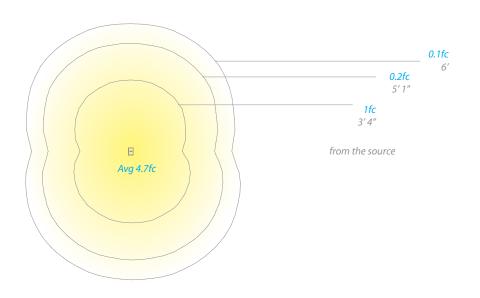

6642, 6643 (120V, 277V)